


# De Programme :  
 Temp. de Machinage. :  
 Valve(s) :  
 :

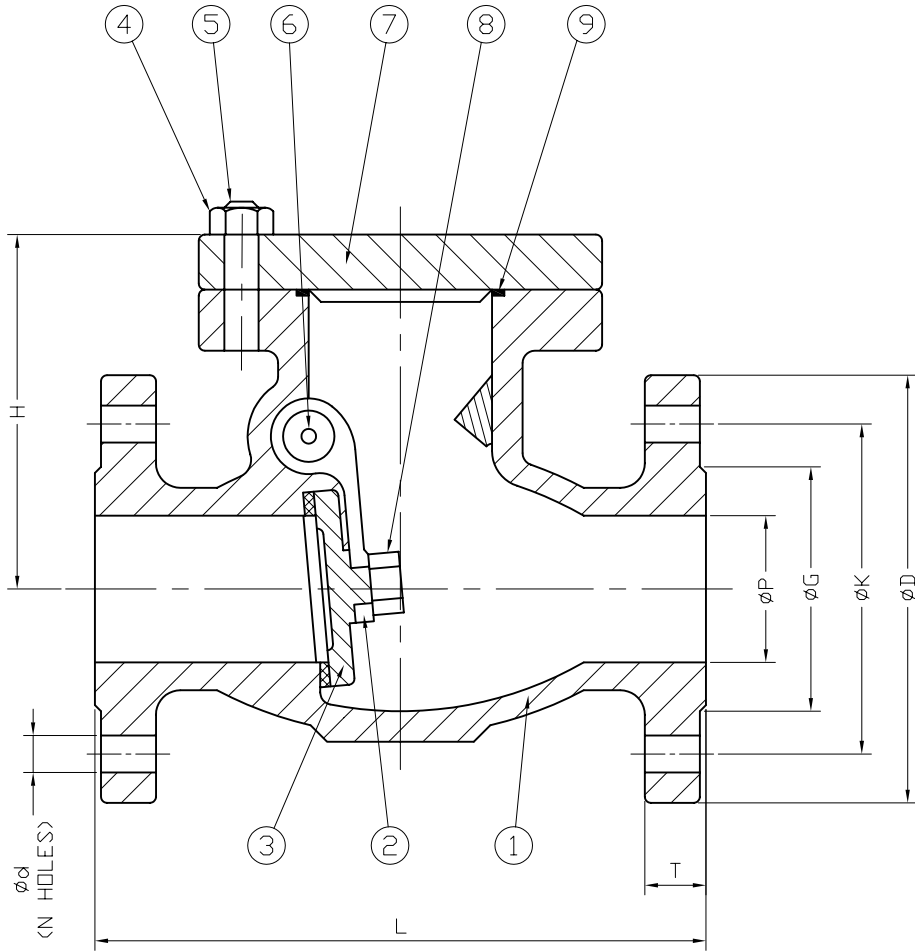

	SIZE	øP	L	H	øD	øK	øG	T	ød	N
IN	1 1/2"	1.58	6.50	3.40	5.00	3.90	2.90	0.60	0.60	4
mm	40.0	40.1	165.1	86.3	127.0	99.0	73.6	15.2	15.2	
IN	2"	1.97	8.00	4.30	6.00	4.70	3.60	0.60	0.80	4
mm	50.0	50.0	203.2	109.2	152.4	119.3	91.4	15.2	20.3	
IN	2-1/2"	2.56	8.50	5.30	7.00	5.50	4.10	0.70	0.80	4
mm	65.0	65.0	215.9	134.6	177.8	139.7	104.1	17.7	20.3	
IN	3"	3.15	9.50	5.30	7.50	6.00	5.00	0.80	0.80	4
mm	80.0	80.0	241.3	134.6	190.5	152.4	127.0	20.3	20.3	
IN	4"	3.94	11.50	6.70	9.00	7.50	6.20	0.90	0.80	8
mm	100.0	100.0	292.1	170.1	228.6	190.5	157.4	22.8	20.3	
IN	6"	5.91	14.50	8.30	11.00	9.50	8.50	1.00	0.90	8
mm	150.0	150.1	368.3	210.8	279.4	241.3	215.9	25.4	22.8	
IN	8"	7.87	19.50	9.80	13.50	11.80	10.60	1.10	0.90	8
mm	200.0	199.8	495.3	248.9	342.9	299.7	269.2	27.9	22.8	
IN	10"	9.84	24.50	12.40	16.00	14.30	12.80	1.20	1.00	12
mm	250.0	249.9	622.3	314.9	406.4	363.2	325.1	30.4	25.4	

9	1	GASKET	304 Sst. + GRAFOIL			
8	1	DISC NUT	316 STAINLESS STEEL			
7	1	COVER	ASTM A-351 GR. CF8M	--		
6	1	PLUG	ASTM A-351 GR. CF8M	--		
5	4	COVER BOLT	304 STAINLESS STEEL	--		
4	4	COVER NUT	304 STAINLESS STEEL	--		
3	1	DISC	ASTM A-351 GR. CF8M			
2	1	ARM	ASTM A-351 GR. CF8M			
1	1	BODY	ASTM A-351 GR. CF8M			
ITEM	QTY	PART DESCRIPTION	MATERIAL SPECIFICATION	REFERENCE / NOTES		
F			 <b>TRUELINE<sub>r</sub> Valve Corporation</b> 	MONTREAL QUEBEC		
E				TITLE 1 1/2"-10" FIG.N-296B SWING CHECK VALVE		
D				ANSI CLASS 150		
C				DRAWN BY: FX DATE : 12/22/2005 SCALE : NTS		
B				APPROVED BY: MDA DATE : 12/22/2005 SHEET: 1 OF: 1		
A	----	-				
LET	REVISION	BY	DATE	MAT'L SPEC'N	DWG No.	REV
A <sub>P</sub> D	C <sub>H</sub> K			CAST Sst.	TL2476B	—

NOTE: ALL DIMENSIONS ARE IN INCHES & MILLIMETERS  
 FACE TO FACE DIMENSIONS: ANSI B16.10  
 SHELL WALL THICKNESS: ANSI B16.34 MSS SP-42  
 END FLANGE DIMENSIONS: ANSI B16.5